

Bucket Elevators / Grain Legs



www.grainhandler.com

Toll Free Number: 800-260-1745



Grain Handler Bucket Elevators move your grain efficiently and gently.

During the receiving or load out process, the Grain Handler elevator provides maximum throughput with less grain damage.

Durable G90 construction is excellent for corrosion resistance and longevity. Inspection doors standard on both sides of head section, gasketed and hinged for ease of access. Heavy Duty Pillow Block Bearings, with Stress Proof Shafting. Crown Faced Drum Style Head Pulley with SOF Holz weld on lagging, for excellent traction, longer life and minimized downtime. Several lining options are available.



Our Continuous Mixed Flow Dryers Accommodate Any Type of Grain






Grain Handler, USA, Inc. is an industry leading manufacturer of Grain Dryers and Grain Handling equipment with installations on farms and grain elevators in the USA, Canada, Mexico, Australia, the Ukraine and China. Founded in 1986, the company leaders have decades of direct experience with farming, grain elevator operations and manufacturing.

The guiding principles of the company are to provide high quality, efficient, and economical products designed to suit the individual customer's needs.

Pulley Size	24"	30"	36"	42"
Capacity (bu per hr)	3,750 to 5,500	5,500 to 8,000	8,000 to 11,000	11,000 to 15,000

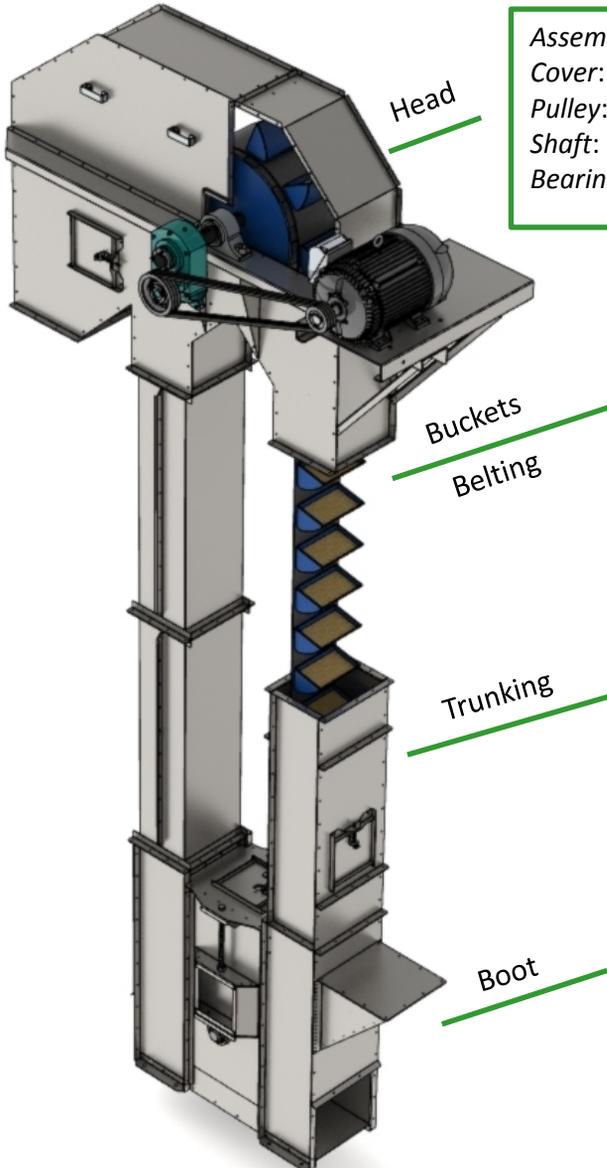

Assembly: 8 Ga. Bolted G90 Galvanized
Cover: 12 Ga. Bolted G90 Galvanized w ¼" UHMW Curve
Pulley: Crowned Slide Lagged Pulley with XT Tapered Bushing
Shaft: 1144-A311 Stress Proof Shafting
Bearings: Heavy Duty Type "E" Twin Tapered Bearings

Buckets: Heavy duty high density polyethylene cups. Light weight, High edged and durable. Several cup venting options are available for any commodity.
Hardware: Zinc plated "fanged" bolts, flat washer & nylock nuts.
Belting: Supreme rubber belting with excellent rip and tear resistance. Oil Resistant and excellent tracking characteristics. PVC belting available upon request.

Galvanized G-90 construction with two piece double formed and bolted sections and welded heavy duty flanges. Formed trunking allows for straight and true sections for ease of installation. Five foot inspection sections, standard with a viewing port for easy access.

Heavy duty construction with top sealed and hinged inspection port for visual access. Standard winged boot pulley on all models (drum pulley options are available upon request) with Stress Proof shafting and heavy duty pillow block bearings.
Assembly: 10 / 8 Ga. Bolted G90 Galvanized.
Pulley: Crowned wing pulley with QD tapered bushings.

Grain Handler Locations

21785 Hamburg Ave.
 Lakeville, MN 55044
 Phone: 612-722-1085
 Fax: 612-722-2642

1012 St. Charles Ave.
 St. Charles, MN 55972
 Phone: 507-932-5492
 Fax: 507-932-5492

Authorized Dealer